



### How You Save On Your Telecom Bill

- VoIP<sup>2</sup>ALL™ reduces costs by choosing to route the telephone call via the least expensive network to any VoIP / Cellular / PSTN Network by means of call forwarding / call back / follow me features.
- IP connection: Your IP Gateway will enable cellular calls your own network.
- Call Back option: Allow employees abroad to call through your organizations network at your *known local low cost*.
- The VoIP function offers considerable cost reduction of the overall call cost
- All VoIP units can be used either as stand-alone gateways or integrated with a SIM Server system. Thus offering a perfect solution for both SMB and Corporate users
- Optional SMS Server solution for bulk SMS, suitable for all VoIP units.
- Compatible with most IP PBX units

## Increased Efficiency. Saves You Money.

VoIP<sup>2</sup>ALL™ is an innovative line that integrates Cellular (GSM UMTS CDMA) Networks with both Internet (VoIP) communication and PSTN Networks. The Device may be used with an analog or IP PBX - in each case it increases the capabilities connection in a cost efficient manner. The user benefits lower day-to-day telecom bills by routing the call via the least expensive route - VoIP, Cellular or PSTN Network.


This innovative VoIP<sup>2</sup>ALL™ product line is modular, flexible and compatible to the current and future communication needs of small to large-scale business.

It simply enables telephone communication at lower cost - inside and out of the organization. The design features AudioCodes renowned, high quality VoIP chip.

VoIP<sup>2</sup>ALL™ grants flexibility in channel allocation to incoming and outgoing calls, between cellular / Internet / landlines from within the same unit. VoIP<sup>2</sup>ALL™ is able to simultaneously work and monitor each individual network protocol with a powerful management program and user-friendly interface software that you can remotely manage or configure the in real time, from any global location. Use the same unit with a mix of GSM/CDMA/UMTS 4 Ports of each choice.

#### Call Management Features

Call Routing	Block all incoming calls on a port (GSM) All incoming calls receive a dial tone, then the user may dial the destination number using DTMF, the calls are routed according to user defined prefix groups. Incoming calls are routed to destination number automatically, options: <ol style="list-style-type: none"> <li>1. Fixed destination number for each incoming port.</li> <li>2. Destination number according to user-defined list, selection cyclic.</li> <li>3. Destination number according to user-defined list, selection according to priority.</li> <li>4. Source routing-transfer of call accordingly to original source IP or number</li> </ol>
Routing Groups	The user can define multi-prefix options for each port. The user can dedicate a ports utilizing the same prefix - the system will route the call according to free port selection. The user can define default port/s that will be used if no other port prefix is defined.
Internal Users Database	Each user has capabilities definitions that define the unit handling of his calls.
CDR	100 CDR's to export to external file- Access, XML, CMV.
DISA	Holds list of extensions ( VOIP ) for automatic direct routing of incoming call – optional.
Call Back	Available - Option
Tone Definitions	Home feeling, the user can choose its own country call progress tones definitions.
SIP Client	Support of register and route calls to other SIP servers (can connect up to 10 V2G together, asterisk, other SIP providers).
SMS	Send & Receive SMS using e-mail. ,SMS Server (optional)

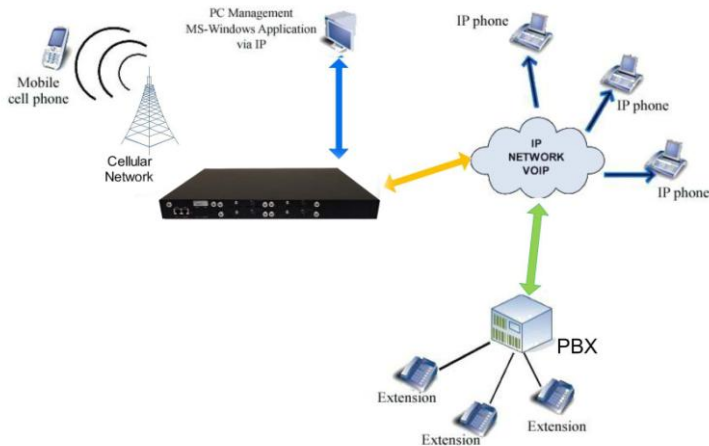

### TARGET USERS

- Corporate - SMB, & SOHO using IP
- Integrators - VARs for PBX upgrading to VoIP or GSM
- Telecom Equipment Distributors
- Telecommunication Service Firms
- Companies with International branches

### More Call Management Features

Sim Recharge	Manual or automatic check by options <ol style="list-style-type: none"> <li>1. Minimum balance or below</li> <li>2. Call minutes</li> <li>3. Number of calls</li> <li>4. After first call</li> </ol>
--------------	--

### Human Behavior

Sim swapping	By time or call duration
Test Call	Auto schedule for random incoming test calls by options <ol style="list-style-type: none"> <li>1. Length of call</li> <li>2. Frequency</li> <li>3. Randomly</li> </ol>
Test SMS	Auto schedule for random incoming test SMS by options <ol style="list-style-type: none"> <li>1. Length of call</li> <li>2. Frequency</li> <li>3. Randomly</li> </ol>

### BCCH Random Rotation between base stations

		GSM Parameters	
Voice channels	8/16/24 Simultaneous	GSM channels	8/16/24 Channels
Codecs	G.711 PCMA/U , G.729A , G.723 , G.726 , G.727	Network types	850 / 900 / 1800 / 1900 MHz (quad-band)
Signaling	SIP – RFC 3261	GSM engine	Wavecom (P5186), SIMCom, Siemens (TC35i)
Echo cancellation	G.168-2002	Transmitter power	+33dBm(2W) 850/900MHz,+30dBm(1W) 1800/1900MHz
SIP account	Management with Authentication		
SIP Server	Up to 32 SIP clients		

### Interfaces UMTS Parameters

Internal SIM Server	Up to 64 Additional SIMs (Optional on 8/16 Ch versions)	UMTS channels	8/16/24
24 Channel	1 SIM per Channel	Network types	UMTS 2100MHz, GSM 850 / 900 / 1800 / 1900
		UMTS engine	SIMCom
		USIM	1 USIM per channel, Small plug-in, 3V

### Other CDMA Parameters

Dimensions	Metric: 420 x 360 x 45 mm (1U)	CDMA channels	8/16/24
Weight	4.5 kg (9.92 lbs.)	Network types	800/1900 MHz
		CDMA engine	Wavecom, AnyDATA
		R-UIM Card	1 R-UIM per channel, Small Plug in, 3V
		Antenna Connector	SMA (female), Impedance 50Ω



**THE EUROTECH ADVANTAGE** Eurotech offers the highest degree of responsibility to its customers and its products. We are here to help you solve your problems. Eurotech in-sources the entire product cycle: from design to manufacturing ensuring quality. We offer world renowned VIP service - and are available for any additional inquires, explanations and questions you may encounter along the way. Don't hesitate to contact us - Eurotech is here for you.